



FRAC PUMP SUCTION & DISCHARGE SEAL




Parker's HGP Profile delivers over three times the life over traditional HNBR D-rings for suction and discharge cover seals in multi-plex frac pump applications.

Owing to its patent pending geometry and Parker's proprietary Resilon® polyurethane materials of construction, the HGP Profile can withstand pressure up to 15,000 psi at 3 hertz in abrasive, acidic fracturing fluid.

Product Features:

- Unique, patent pending geometry provides increased sealing surface protection
- Greater in-gland stability resists proppant intrusion – preventing corrosion
- Tough, abrasion-resistant Resilon® 4300 polyurethane-material resists wear fro caustic fracking fluid proppant
- Compression-set resistant material ensures positive sealing at high temperatures, even after long, continuous use

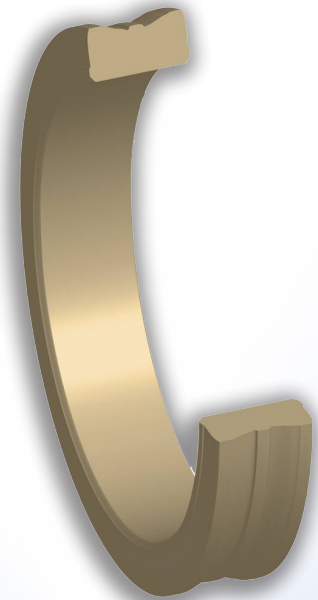

Stocking The Most Popular Sizes

Other sizes available on request.

4300HGP31304750-622	4¹/₈" × 4³/₄" × 5¹/₁₆" × 5⁵/₈"
4300HGP25004750-622	4¹/₄" × 4³/₄" × 1¹/₄" × 5⁵/₈"
4300HGP25005250-622	4³/₄" × 5¹/₄" × 1¹/₄" × 5⁵/₈"
4300HGP25005500-622	5" × 5¹/₂" × 1¹/₄" × 5⁵/₈"
4300HGP25005750-622	5¹/₄" × 5³/₄" × 1¹/₄" × 5⁵/₈"